



ENGINEERING SUBMITTAL DATA SHEET

FVIR compliant residential power vent
natural & propane gas-fired water heaters

UG50-65 MODELS


41.6 imperial gallons / 50 U.S. gallons
insulated with 1" or 2" eco-friendly **GREENFOAM**

All models meet or exceed NRCAN energy efficiency requirements

Model	Storage Capacity			Type of gas	Input Btu	Recovery 90 °F / 50 °C			E. F. Number	Altitude	Est. ship. weight lb (kg)
	(US) gal	Litres	Imp. gal			(US) gal	Litres	Imp. gal			
UG50-65LFPV-N1U	50	189	41.6	N	65,000	67.4	255	56.1	0.59	N	190(86)
UG50-65LFPV-N2U	50	189	41.6	N	65,000	67.4	255	56.1	0.61	N	190(86)
UG50-65LFPV-P1U	50	189	41.6	LP	65,000	68.3	258	56.9	0.59	N	190(86)
UG50-65LFPV-P2U	50	189	41.6	LP	65,000	68.3	258	56.9	0.62	N	190(86)

DIMENSIONS inches (cm)

Model	A	B	C	D	E	F	G	H	I	J	K
All UG50-65	7 1/8 (18)	40 1/16 (102)	51 1/4 (130)	12 (31)	52 3/4 (134)	59 1/2 (151)	3 (7.6)	22 1/2 (57)	11 (28)	15.6°	90.0°

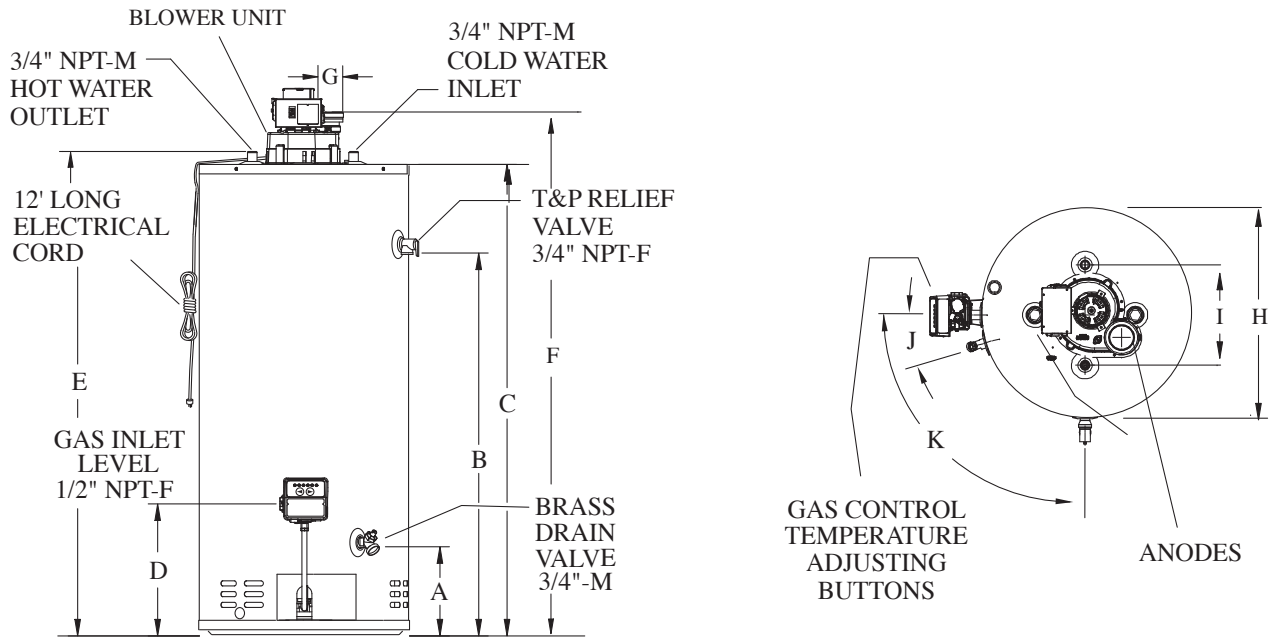

JOB TITLE _____

ADDRESS _____

CONTRACTOR _____

ADDRESS _____

ENGINEER _____

SUBMITTED DATE _____

REQUIRED PRODUCT _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

REQUIRED DATE _____

In accordance with our product continued improvement policy, Giant Factories Inc. reserves the right to make changes or improvements at any time without prior notice.

giantinc.com



40 Lesage Avenue, Montreal-East (Quebec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969