



ENGINEERING SUBMITTAL DATA SHEET

FVIR compliant residential power vent
natural & propane gas-fired water heaters

UG50 MODELS


41.6 imperial gallons / 50 U.S. gallons
insulated with with 1" or 2" eco-friendly **GREENFOAM**
All models meet or exceed NRCAN energy efficiency requirements



Model	Storage Capacity			Type of gas	Energy Star	Input Btu	Recovery 90 °F / 50 °C			E. F. Number	Altitude	Est. ship. weight lb (kg)
	(US) gal	Litres	Imp. gal				(US) gal	Litres	Imp. gal			
UG50-40LFPV1-N1U	50	189	42	N	—	40,000	41.5	157.0	34.5	0.62	N & H	166 (75)
UG50-40LFPV1-N2U	50	189	42	N	✓	40,000	41.5	157.0	34.5	0.67	N & H	167 (76)
UG50-38LFPV1-P1U	50	189	42	LP	—	38,000	40.4	153.1	33.7	0.63	N & H	166 (75)
UG50-38LFPV1-P2U	50	189	42	LP	✓	38,000	40.4	153.1	33.7	0.67	N & H	167 (76)

DIMENSIONS inches (cm)

Model	A	B	C	D	E	F	G	H (-1U)	H (-2U)	I	J	K
All UG50	7 1/8 (18)	40 1/16 (102)	48 3/8 (123)	12 (31)	49 5/8 (126)	58 1/2 (149)	2-3 (5-7.5)	22 1/2 (57)	23 1/2 (60)	8 (20)	17.4°	90.0°

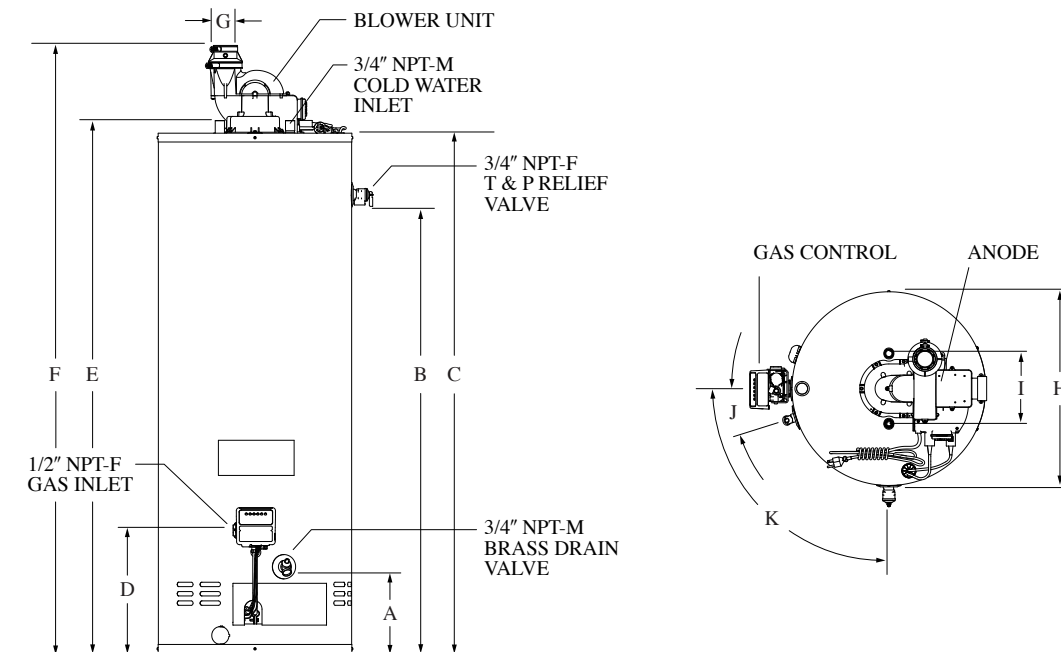

JOB TITLE _____

ADDRESS _____

CONTRACTOR _____

ADDRESS _____

ENGINEER _____

SUBMITTED DATE _____

REQUIRED PRODUCT _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

REQUIRED DATE _____

In accordance with our product continued improvement policy, Giant Factories Inc. reserves the right to make changes or improvements at any time without prior notice.

giantinc.com



40 Lesage Avenue, Montreal-East (Quebec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969