



ENGINEERING SUBMITTAL DATA SHEET

FVIR compliant residential power direct vent
natural & propane gas-fired water heaters

UG50 MODELS

40.0 & 42 imperial gallons / 48.0 & 50 U.S. gallons
insulated with eco-friendly **GREENFOAM**

All models meet or exceed NRCAN energy efficiency requirements




Model	Storage Capacity			Type of gas	Energy Star	Input BTU	Recovery 90 °F / 50 °C			E. F. Number	Altitude	Est. ship. weight	
	(US) gal	Litres	imp. gal				(US) gal	Litres	imp. gal			lb	(kg)
UG50-38TFPDV-N2U	48	182	40.0	N	✓	38,000	40.4	153	33.7	0.67	N & H	190	(86)
UG50-41TFPDV-P2U*	50	189	42.0	P	—	41,000	43.6	165	36.3	0.64	N & H	190	(86)

*Available with 3 inch venting only

DIMENSIONS inches (cm)

Modèle	A	B	C	D	E	F	G	H	I	J	K	L
UG50	9 3/8 (24)	50 1/4 (128)	58 5/8 (149)	14 1/4 (36)	60 1/4 (153)	68 1/2 (174)	3 (7,6)	22 (56)	8 (20)	17,0°	90,0°	16 1/4 (41)

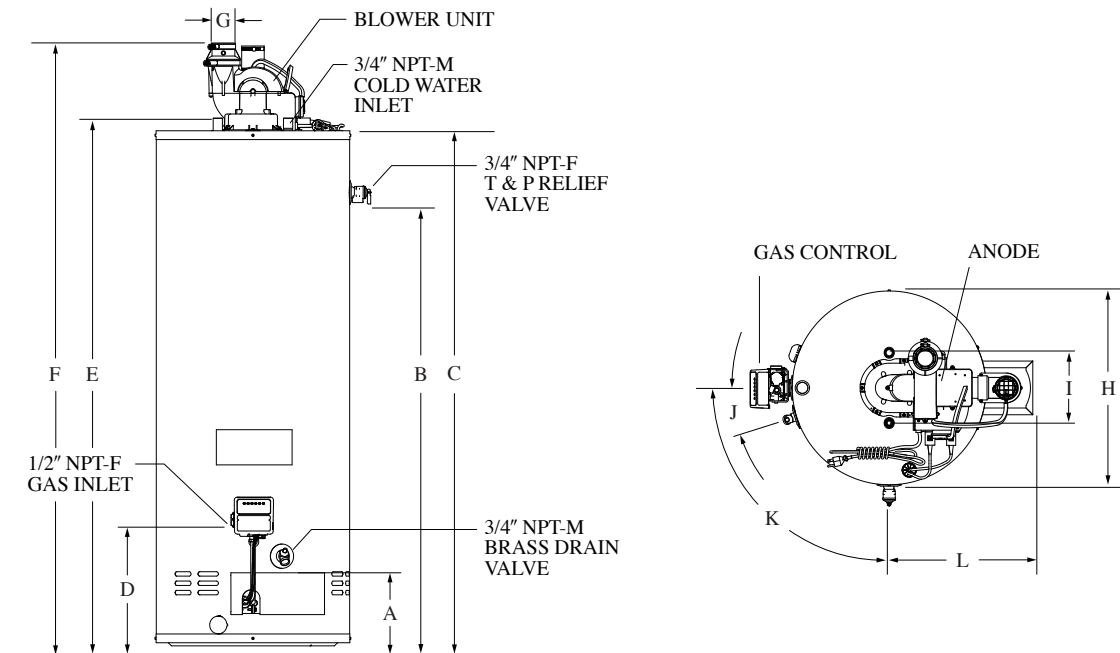

JOB TITLE _____

ADDRESS _____

CONTRACTOR _____

ADDRESS _____

ENGINEER _____

SUBMITTED DATE _____

REQUIRED PRODUCT _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

REQUIRED DATE _____

In accordance with our product continued improvement policy, Giant Factories Inc. reserves the right to make changes or improvements at any time without prior notice.

giantinc.com



40 Lesage Avenue, Montreal-East (Quebec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969