



ENGINEERING SUBMITTAL DATA SHEET

C191.0 SUPER CASCADE bottom entry, double-glass residential electric water heaters





152E MODELS

41 imperial gallons / 184 litres insulated with 2" eco-friendly GREENFOAM™

These models meet the safety and construction requirements of CSA 22.2 Standard and meet or exceed RNCAN energy efficiency requirements



Models	Storage Capacity			Input	Voltage	Standby loss	Diameter (A)	Height (B)	C	D	E	Plumbing connections	Est. ship. wt. lb (kg)
	US gal.	Litres	Imp. gal.				In. (cm)	In. (cm)	In. (cm)				
152E-1F8M	49	184	41	1,500 W	120 V	66 W	22 (56)	48 1/8 (122)	2 1/2 (6)	45°	45°	3/4" NPT	140 (64)
152E-2F8M	49	184	41	3,000 W	208 V	66 W	22 (56)	48 1/8 (122)	2 1/2 (6)	45°	45°	3/4" NPT	140 (64)
152E-3F8M	49	184	41	3,000 W	240 V	66 W	22 (56)	48 1/8 (122)	2 1/2 (6)	45°	45°	3/4" NPT	140 (64)

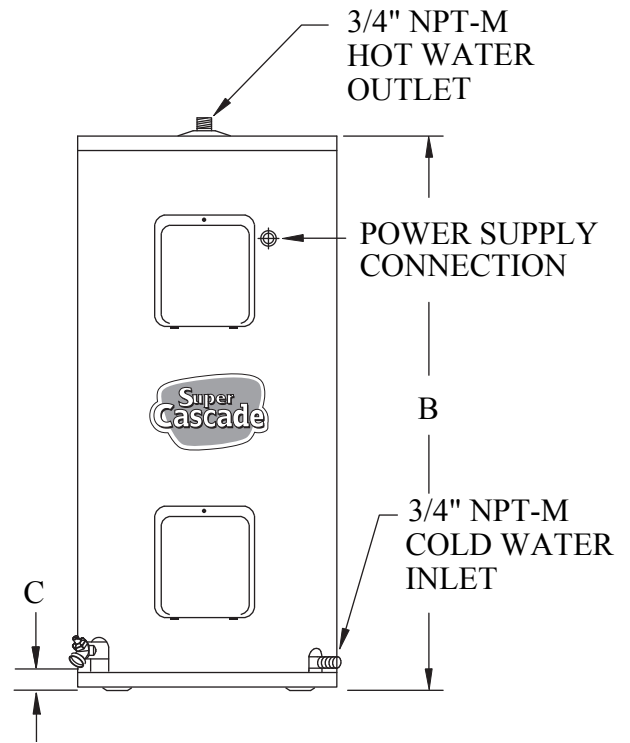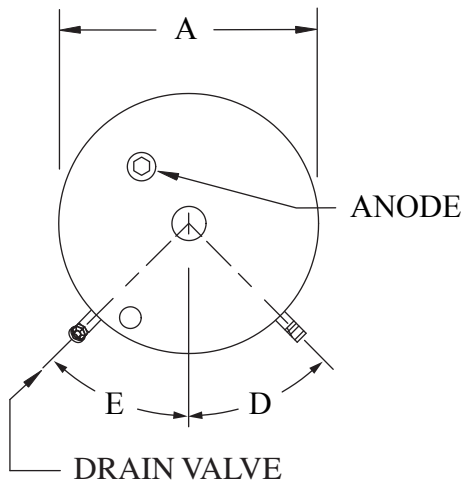

JOB TITLE _____

ADDRESS _____

CONTRACTOR _____

ADDRESS _____

ENGINEER _____

SUBMITTED DATE _____

REQUIRED PRODUCT _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com



40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969