



ENGINEERING SUBMITTAL DATA SHEET

**FVIR compliant residential power direct vent
 natural & propane gas-fired water heaters**



UG50 MODELS

**40 imperial gallons / 182 Litres
 insulated with 2" eco-friendly GREENFOAM**

**These models meet the safety and construction requirements of CSA 4.1 Standard and meet
 or exceed NRCAN energy efficiency requirements**




Models	Storage Capacity			Type of gas	Energy Star	Input BTU	Recovery 90 °F / 50 °C			E. F. Number	Altitude	Est. ship. weight	
	(US) gal	Litres	Imp. gal				(US) gal	Litres	Imp. gal			lb	(kg)
UG50-38TFPDV1-N2U	48	182	40	N	✓	38,000	40.9	155.0	34.1	0.67	N & H	185	(84)
UG50-41TFPDV1-P2U*	48	182	40	LP	—	41,000	43.6	165.1	36.3	0.64	N & H	185	(84)

*Available with 3-inch venting only

DIMENSIONS inches (cm)

Models	A	B	C	D	E	F	G		H	I	J	K	L
							(*N2U)	(*P2U)					
UG50	9 ½ (24)	50 ½ (128)	58 ⅝ (149)	14 ¼ (36)	59 ⅝ (151)	68 ⅝ (174)	2 (5)	3 (7.6)	22 (56)	8 (20)	17.4°	90.0°	16 ¼ (41)

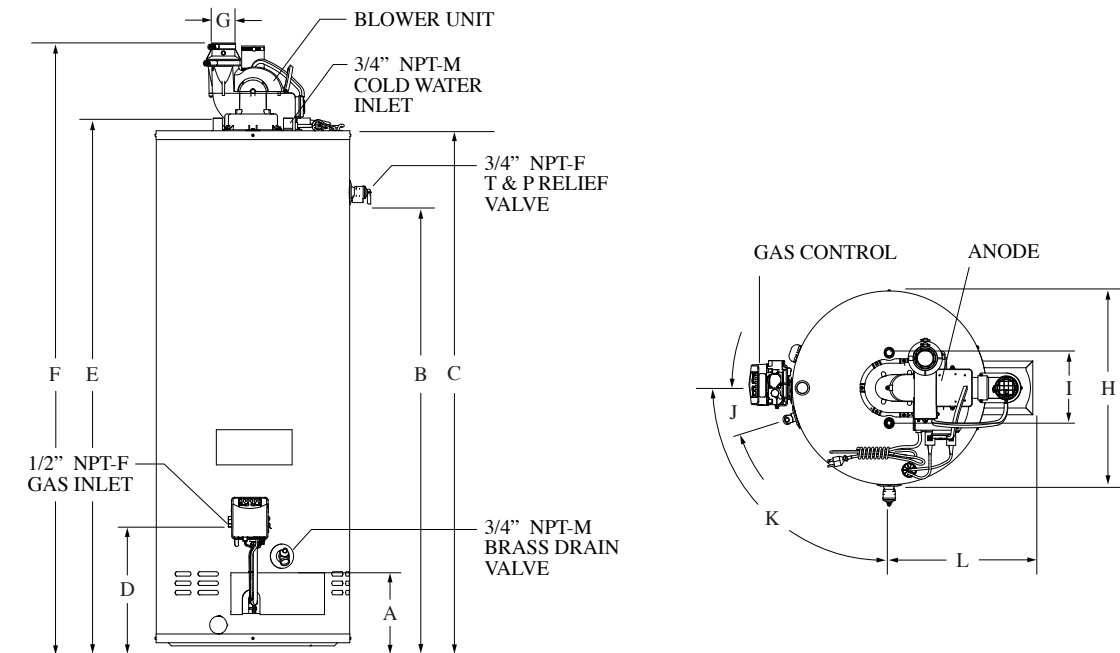

JOB TITLE _____

ADDRESS _____

CONTRACTOR _____

ADDRESS _____

ENGINEER _____

SUBMITTED DATE _____

REQUIRED PRODUCT _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com



40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969