



ENGINEERING SUBMITTAL DATA SHEET

FVIR compliant residential power vent
natural & propane gas-fired water heaters

UG50 MODELS

41.6 imperial gallons / 189 litres
insulated with eco-friendly **GREENFOAM**



These models meet the safety and construction requirements of CSA 4.1 Standard and meet or exceed NRCAN energy efficiency requirements




Models	Storage Capacity			Type of gas	Input BTU	Recovery 90 °F / 50 °C			E.F. Number	Energy Star	First Hour Rating	Altitude	Est. ship. weight lb (kg)
	U.S. gal	Litres	Imp. gal			U.S. gal	Litres	Imp. gal					
UG50-40LFPV1-N1U	50	189	41.6	N	40,000	41.5	157.0	34.5	0.62	—	84.0	N & H	166 (75)
UG50-40LFPV1-N2U	50	189	41.6	N	40,000	42.0	159.0	35.0	0.67	✓	84.0	N & H	167 (76)
UG50-38LFPV1-P1U	50	189	41.6	LP	38,000	40.4	153.1	33.7	0.63	—	84.0	N & H	166 (75)
UG50-38LFPV1-P2U	50	189	41.6	LP	38,000	40.9	155.0	34.1	0.67	✓	84.0	N & H	167 (76)

N1 & P1 = 1" insulation , N2 & P2 = 2" insulation

DIMENSIONS inches (cm)

Models	A	B	C	D	E	F	G	H (-1U)	H (-2U)	I	J	K
All UG50	7 1/8 (18)	40 (102)	48 3/8 (123)	12 (31)	49 5/8 (126)	58 1/2 (149)	2-3 (5-7.6)	22 1/2 (57)	23 1/2 (60)	8 (20)	15.6°	90.0°

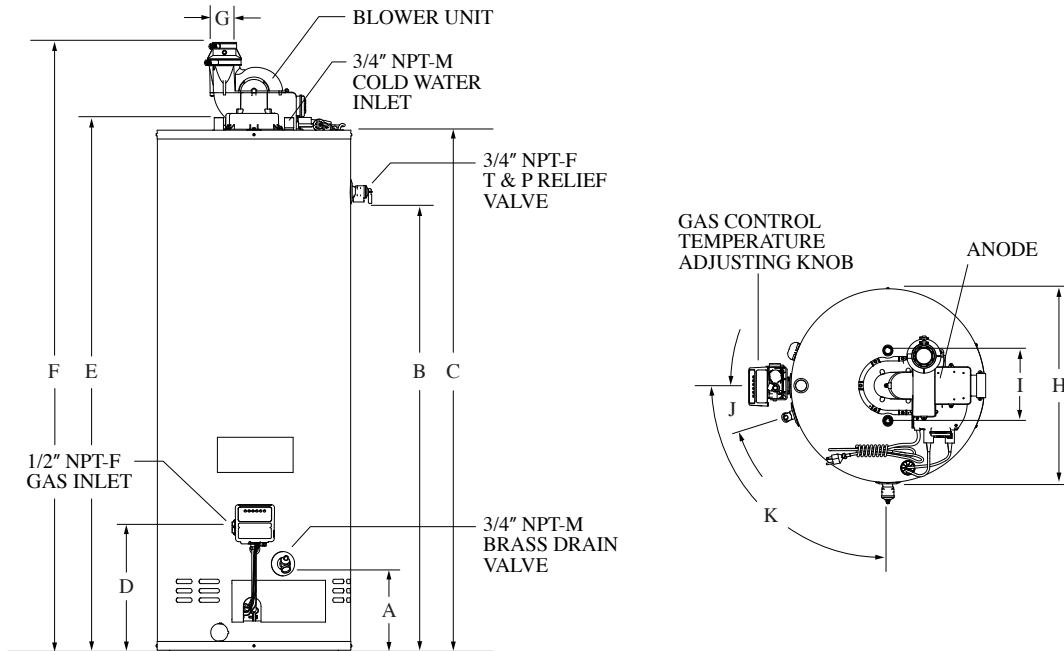

JOB TITLE _____

ADDRESS _____

CONTRACTOR _____

ADDRESS _____

ENGINEER _____

SUBMITTED DATE _____

REQUIRED PRODUCT _____

MODEL NO. _____	SIZE _____	QUANTITY _____
MODEL NO. _____	SIZE _____	QUANTITY _____
MODEL NO. _____	SIZE _____	QUANTITY _____
MODEL NO. _____	SIZE _____	QUANTITY _____

REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com



40 Lesage Avenue, Montreal-East (Quebec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969