



Enhancing everyday living

ENGINEERING SUBMITTAL DATA SHEET

Condensing commercial natural & propane gas-fired water heaters

UGC 80S MODELS

67 imperial gallons / 303 Litres


insulated with 2" water blown foam insulation



Models	Storage Capacity			Input BTU	First Hr. Rating			Thermal Efficiency	100°F (56°C) Rise U.S. GPH (L/hr)	Est. Ship. Weight lb (kg)
	(US) gal	Litres	(Imp) gal		(US) gal	Litres	(Imp) gal			
UGC80S-100	80	303	67	100,000	189	715.4	157.4	96 %	116 (439.1)	235 (106.6)
UGC80S-130	80	303	67	130,000	227	859.3	189.0	95 %	150 (567.8)	235 (106.6)
UGC80S-160	80	303	67	160,000	265	1,003.1	220.6	95 %	184 (696.5)	235 (106.6)
UGC80S-199	80	303	67	199,000	314	1,188.6	261.5	95 %	229 (866.8)	235 (106.6)

DIMENSIONS inches (cm)

Models	A	B	C	D	E	F	G	H	J	K	L	M
All UGC80S	23 (58.4)	72 (182.9)	64 (162.6)	5 (12.7)	17 (43.2)	18 ½ (47.0)	7 ¾ (19.7)	3 ¼ (8.3)	64 (162.6)	34 ¼ (87.0)	64 (162.6)	29 ¾ (75.6)

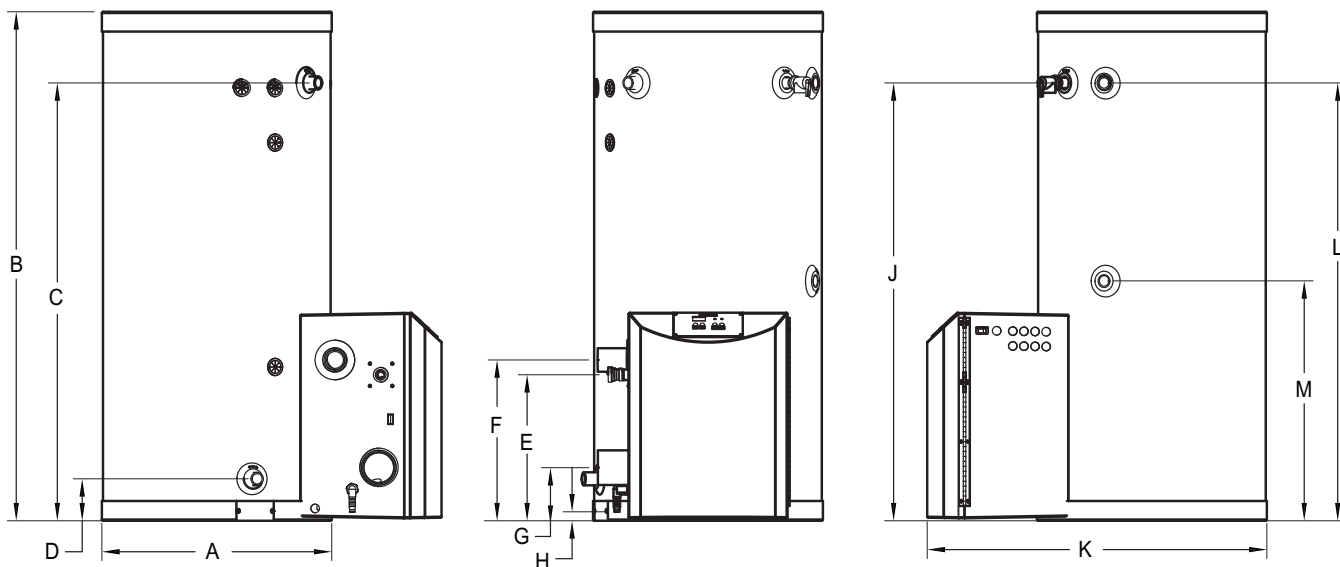

JOB TITLE _____

ADDRESS _____

CONTRACTOR _____

ADDRESS _____

ENGINEER _____

SUBMITTED DATE _____

REQUIRED PRODUCT _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com



40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969