



TAKE A ***Giant*** STEP FORWARD, HELP STOP THE GREENHOUSE EFFECT

Giant

POINT OF USE WATER HEATERS

GREENFOAM[®]

Water blown
Urethane foam insulation
unique to Giant
No CFC'S
No HCFC'S
No VOC'S


PROTECTION OF THE OZONE LAYER IS VITAL TO EVERYONE ON THIS PLANET!



HIGH PERFORMANCE POINT OF USE ELECTRIC WATER HEATERS

OUTSTANDING TECHNICAL FEATURES

MODELS 110 & 115

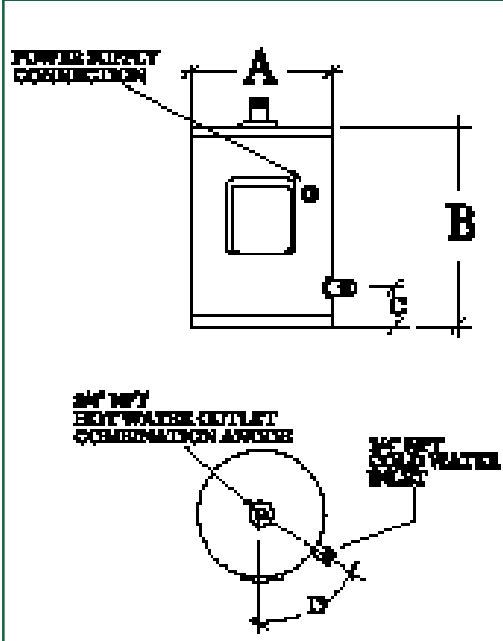

MULTIPLE USAGE

Compact size water heaters can be used in cottages, offices, stores, and individual washrooms. They can also be installed under a counter.

INSULATION

A 2" thick uniform blanket of **GREENFOAM** insulation provides a heat retention system that keeps the water hotter for longer periods, reduces stand-by losses and energy costs. **GREENFOAM** is 100% recyclable and contains no HCFC'S (hydrochlorofluorocarbons), no CFC'S (chlorofluorocarbons), and no VOC's (volatile organic compounds).

AUTOMATIC TEMPERATURE CONTROL

Ajustable thermostat will provide years of reliable trouble free service at the desired water temperature and a safety cut off is provided for abnormal conditions.

ELECTRIC ELEMENT

All models are equipped with CSA approved screw-in or bolt-on elements made by GIANT.

INNER TANK

A uniquely formulated blue glass is fused to a specially treated steel at 871°C (1600°F) to provide the best coating available against corrosion for many years. The tank is rated at 2068 kPa (300PSI) and will withstand a working pressure up to 1034 kPa (150PSI).

ANODIC PROTECTION

A unique magnesium anode rod (AZ31) that exceeds CSA standard C309 requirements is installed for rust prevention and extended tank life.

WATER CONNECTIONS

All water heaters are equipped with 3/4" NPT dielectric plastic lined galvanized nipples for longer tank life.


TEMPERATURE & PRESSURE RELIEF VALVE

Please note the temperature & pressure relief valve connection on this unit. A temperature & pressure relief valve **MUST** be included in the installation for safety purposes.

WARRANTY

Giant point of use electric water heaters are warranted against inner tank leakage from the date of installation. The same warranty condition applies to all component parts. During the original warranty period, Giant will replace a water heater that is proven to be defective with an equivalent new water heater (transportation and labor costs excluded). This replacement water heater will be warranted for the duration of the original warranty. Defective component parts will be replaced under the same conditions. For complete details about Giant's warranty plan, please refer to the instruction manual accompanying each water heater or contact your nearest Giant distributor.

MODEL 130

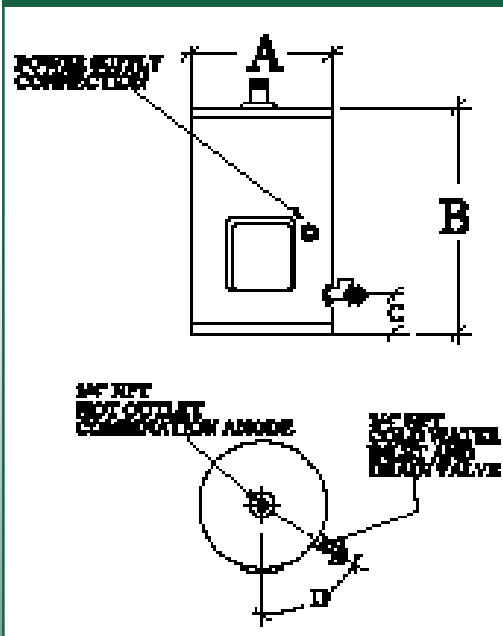

SPECIFICATIONS AND DIMENSIONS

MODEL	Storage cap. US Gal - L - Imp. Gal.		Factory installed wattages**						E.F. Num.	Diameter (A)		Height (B)		C	D	Est. ship. weight Lbs - Kg			
			120V		208V		240V			Inches - cm		Inches - cm							
			Watt	Amp.	Watt	Amp.	Watt	Amp.					Inches - cm						
2" nominal																			
110	7	27	6	1500	12.50	3000	14.42	3000	12.50	—	18 1/4	46	15 1/4	38	2 1/8	5	58°	45	20
115	15	54	12	1500	12.50	3000	14.42	3000	12.50	.92	18 1/4	46	24 1/4	62	2 1/8	5	58°	61	28
130	28	100	22	1500	12.50	3000	14.42	3000	12.50	.91	18 1/4	46	41 1/4	105	2 1/8	5	58°	90	41

** Other wattages available upon request.

All models are factory set at 60°C (140°F) for Canadian models and 125°F (51.7°C) for American models but approved with 71°C (160°F) outlet temperature.

In accordance with our company policy of on-going product improvement, USINES GIANT FACTORIES INC. reserves the right to make changes without notice.